


TECHNICAL SPECIFICATION

HC44-4310F-200W

HC44-4310F-200W

4*4 hybrid, 380-2700 MHz(tetra + mobile) with 4.3-10 connectors

Outline(approx.):

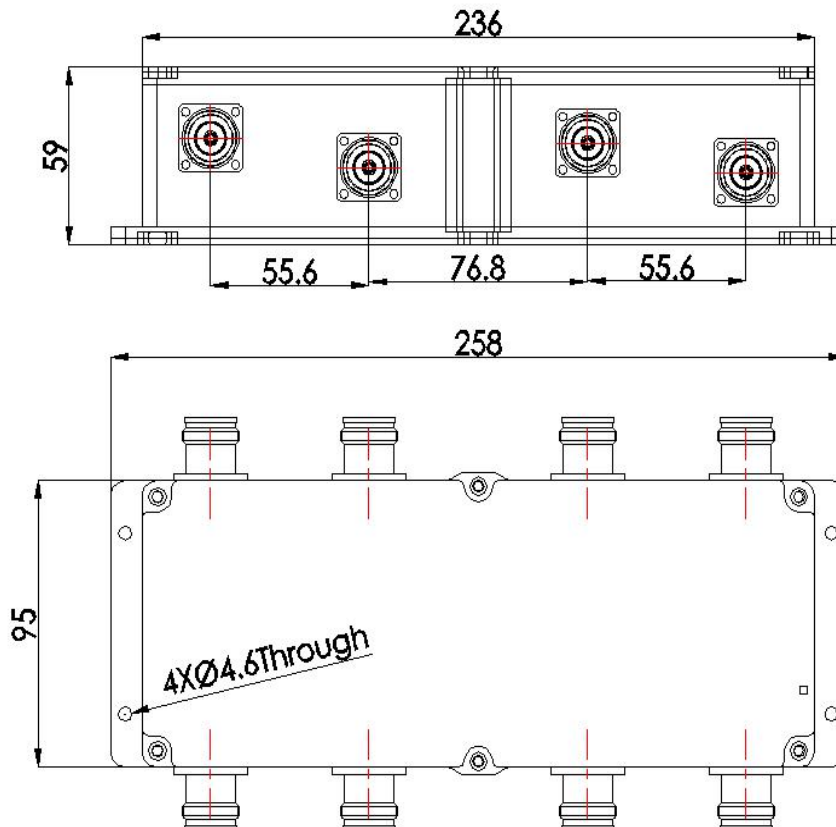

Electrical		Mechanical ,Environment	
Frequency range(MHz)	380 ~ 2700	Connect type	4.3-10 (Female)
Insertion loss(dB)	≤8.0	Weight(g)	3200 (approx.)
Coupling (dB)	≤±2.0	Color	Black
VSWR	≤1.35	Relative humidity	5~95%
Power (W)	≥200	Temperature (℃)	-30 ~ 70
Impedance(Ω)	50	Connector surface	Tri-Metal
Isolation(dB)	≥20	Environmental	Indoor/Outdoor
PIM3(dBc)	≤-160dBc@2×43dBm	Degree of protection	IP65