


Indoor Wide band Omni Antenna coverage 698MHz - 4000MHz




Electrical Specifications					
Item No.	AI698-4000HH06i360B-4310F				
Frequency Range	MHz	698-806	806-960	1710-2700	3300-4000
Gain	dBi	1.5±0.5	2.2±0.5	4.5±1.0	6.0±1.0
Polarization		Linear Horizontal			
VSWR		≤1.8	≤1.8	≤1.8	≤1.8
Isolation	dB	≥16	≥16	≥20	≥25
PIM, 3rd Order, 2 x 20 W,	dBc	≤-153			
Input Power, maximum	watts	50			
Impedance	ohm	50			
Mechanical Specification					
Connector Type		4.3-10 female×2			
Size	mm	Φ266×18			
Antenna Weight	kg	0.5			
Mounting Kit		Ceiling, via hole (standard)			
Radome Material and		ABS, White, RAL9003			
Operational Temperature	oC	-55~60			
Operational Humidity	%	< 95			
*This product is not suitable for installation on metal ceiling					
Radiation Pattern					

Horizontal
pattern

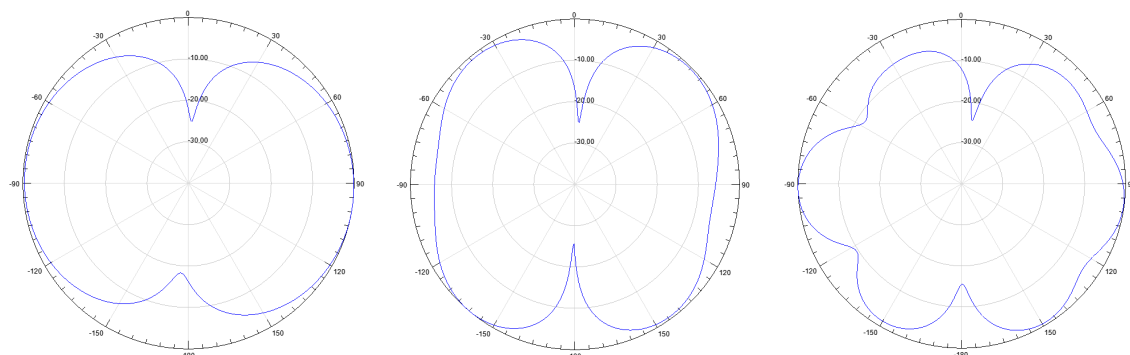



Vertical
pattern

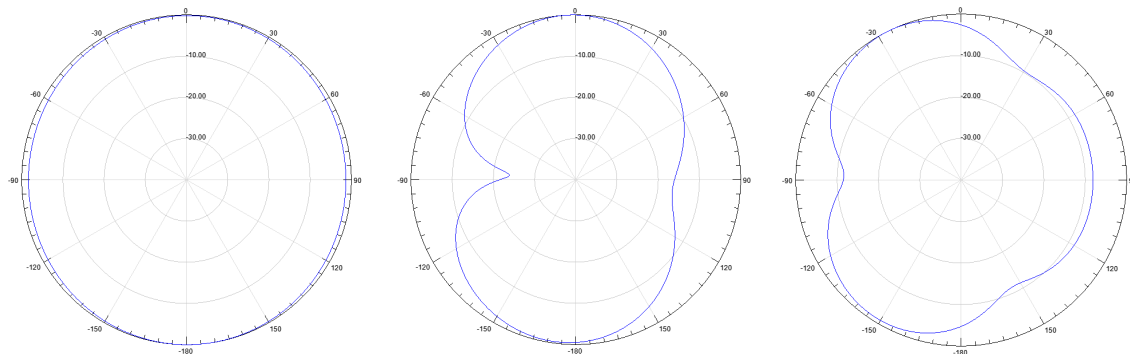

900MHz

1710MHz

2500MHz

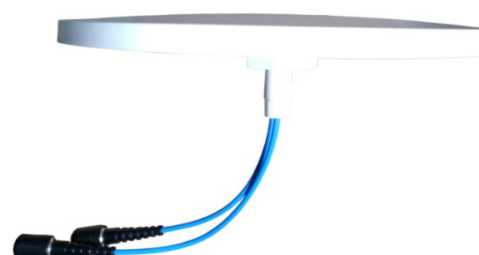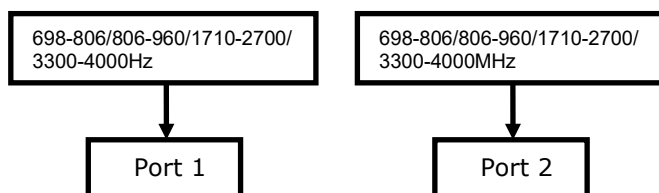

Maahantuoja / Imported by: Orbis Oy, www.orbis.fi
Tuotekoodi / Product code: 3008499